

### Ace Pendant

AC-S + ■ ▲

#### DESCRIPTION

ACE responds to market trends in the optimal pursuit of balance between efficiency, aesthetics, and technology. Simple forms merge with the most advanced electronic offerings for contemporary lighting. ACE boasts innovative features, refined and current finishes. It can be installed as a suspension, wall, or ceiling fixture and can be combined with other components to expand its range of applications. It comes in two sizes, with Led boards of different power, available in matte black, gold, and bronze finishes. Both On/Off and dimmable solutions are available.




#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Colour  
Power  
Lumen output - Full emission  
Efficacy

**Pendant**  
**aluminum**  
**Anodised**  
**Black**  
**9,5 W**  
**max 560 lm**  
**max 59 lm/W**

\* Code to complete

Colour	■	CCT	▲
Black	B		1
			2
			3

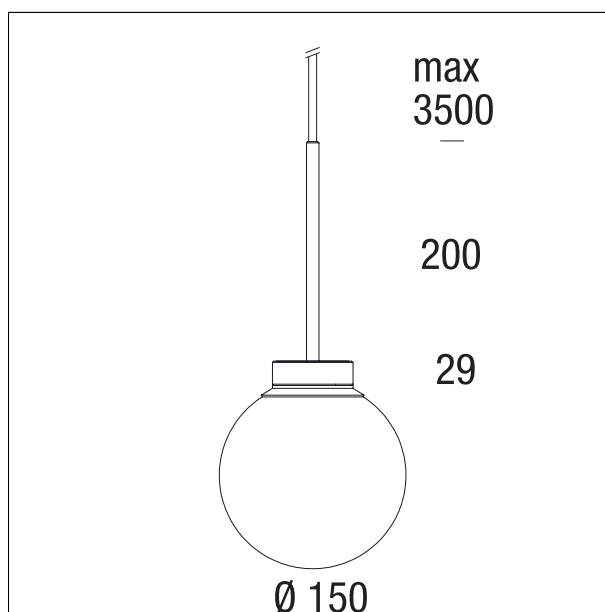

#### ELECTRICAL CHARACTERISTICS

feeding **350mA**  
Insulation class **Class III**

#### MECHANICAL CHARACTERISTICS

product IP rate **IP20**

### Ace Pendant

AC-S + ■ △

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source coding	<b>RG0</b>
CRI	<b>CRI &gt; 80</b>
SDCM	


#### LIGHTING DETAILS

emission	<b>diffused</b>
optic	<b>180°</b>

#### COMPONENTS

Rosone - 220-240Vac, alimentatore incluso

BSS02AB + ■ △



\* Code to complete

Colour	<span style="color: red;">■</span>	Control	<span style="color: red;">△</span>
nero	B	DALI	DA
bianco	W	On/Off	NF
		Push	PU

Rosone Trimmed - 220-240Vac, alimentatore incluso

BSS04AB + ■ △



\* Code to complete

Colour	<span style="color: red;">■</span>	Control	<span style="color: red;">△</span>
nero	B	DALI	DA
bianco	W	On/Off	NF
		Push	PU

Ø70

### Ace Pendant

AC-S+ ■△

---