ΡλΝ

Ace Ceiling - Wall


BA-C + ■ △

DESCRIPTION

ACE responds to market trends in the optimal pursuit of balance between efficiency, aesthetics, and technology. Simple forms merge with the most advanced electronic offerings for contemporary lighting. ACE boasts innovative features, refined and current finishes. It can be installed as a suspension, wall, or ceiling fixture and can be combined with other components to expand its range of applications. It comes in two sizes, with Led boards of different power, available in matte black, gold, and bronze finishes. Both On/Off and dimmable solutions are available.



PRODUCTS CHARACTERISTICS

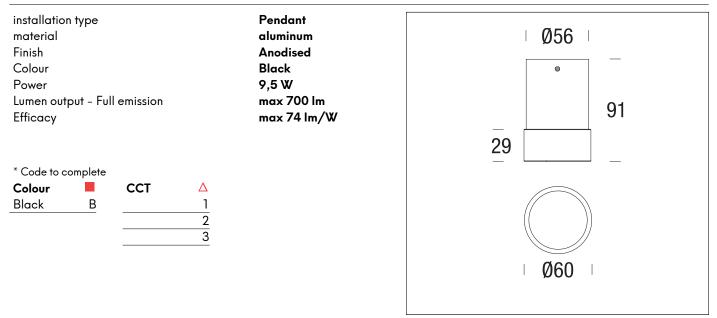

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
Insulation class	Class III

MECHANICAL CHARACTERISTICS

product IP rate

IP20

PAN Srl Via G. Michelucci, 1 50028 Barberino Tavarnelle Firenze, Italy Tel. +39 055 80 59 336/7 Fax +39 055 80 59 338 panint@panint.it www.panint.it

This datasheet is property of Pan Srl. All rights reserved. We reserve the right to make technical changes without notice.

ΡλΝ

Ace Ceiling - Wall

BA-C + ■ △

LED SOURCE DETAILS

led source type	SMD Led
Light source coding	RG0
CRI	CRI > 80
SDCM	

LIGHTING DETAILS

emission	
optic	

downlight 120°