

### Bahia

**GRF16111CA** - ø 60 cm. - 40 W - 2650 lm / 3000 K / CRI > 80

#### DESCRIPTION

The circular suspension is made of painted aluminum extrusion. Available colors white and matt black. The PMMA screen guarantees the optimal emission of LED board luminous fluxes. The device is adjustable in height through the 3 steel cables with a mechanical fixing system (grip-lock). The high efficiency driver is integrated in the canopy. Multifunction dimmable versions with 1... 10V, Push, DALI control available.




Switch

**CASAMBI**

#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Color  
Power  
Lumen output - Full emission  
Diameter  
net weight

**High Bays**  
**Aluminum**  
**Painted**  
**White**  
**40 W**  
**2650 lm**  
**ø 60 cm.**  
**3 kg.**

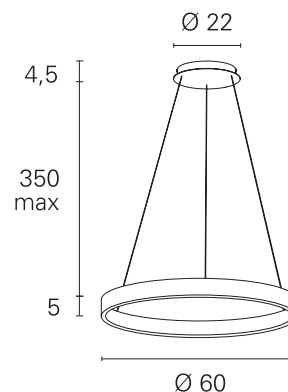

#### ELECTRICAL CHARACTERISTICS

feeding  
driver  
Insulation class

**220÷240 V**  
**CASAMBI**  
**Class I**

#### MECHANICAL CHARACTERISTICS

product IP rate

**IP20**

### Bahia

**GRF16111CA** - ø 60 cm. - 40 W - 2650 lm / 3000 K / CRI > 80

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>CASAMBI</b>
--------	----------------

#### LIGHTING DETAILS

emission	<b>Downlight</b>
optic	<b>120°</b>

#### PHOTOMETRIC

