

Maya Trimmed Filo

SM-AAAYQ2MWNF - 3000 K - White / 6 W / 3000 K / CRI >90

DESCRIPTION

Maya recessed it's available with trimless installation and frame at sight. The range can be divided in two major models: with wire optical plane (Maya Filo) and landed optical plane (Maya Dark). An optical bank which 4 cluster only, enables the use in spaces where a good lighting is required but installation space is restricted. The product can be configured even with a micro prismatic or brushed screen. It guarantees luminous efficiency on top category and highest Standard on electronic components.


Switch

On÷Off



PRODUCTS CHARACTERISTICS

installation type	Recessed Spotlights
material	Aluminum
Color	White
Power	6 W
Lumen output - Direct emission	555 lm
Efficacy	92,5 lm/W
Dimensions	150 mm.

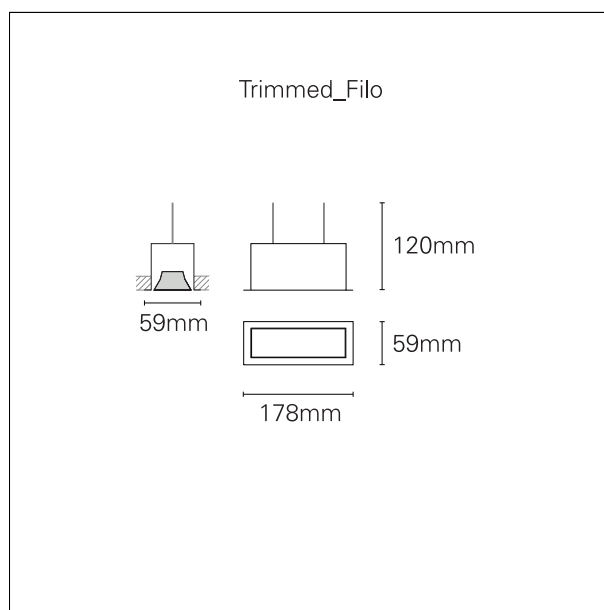

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On÷Off
Insulation class	Class I

HOLE RECESS DIMENSIONS

a x b hole recess	46x159x80 mm
-------------------	---------------------

Maya Trimmed Filo

SM-AAAYQ2MWNF - 3000 K - White / 6 W / 3000 K / CRI >90

LED SOURCE DETAILS

led source type	LED SMD
LED current	250 mA
LED voltage	23 V
Energy class	E
Service lifetime	L80 / B20 - 50.000 h.
Light temperature	3000 K
CRI	CRI >90
SDCM	< 3

DRIVER CHARACTERISTICS

driver	On+Off
Current	250 mA
Voltage	36V
Power factor	> 0,9

LIGHTING DETAILS

optic	Microprismatic
Beam angle - direct	120°
Screen type	PC
UGR	< 19

PHOTOMETRIC

