

Hoop

SOS00116 - ø 60 cm. - 42 W - 2520 lm / 3000 K / CRI > 80

DESCRIPTION

Hoop is a pendant made of matt white painted aluminium and equipped with a PMMA diffusing screen. It is suspended with three steel cables covered with transparent sheath and adjustable in height thanks to the three "grip locks" positioned on the body of the appliance. Thanks to Hoop, soft and diffused light effects are obtained, suitable for illuminating indoor ambients comfortably and without harsh shadows. The driver included can be On/Off or dimmable multifunction 1... 10V, Push, DALI controlled, and feeds a high efficiency SMD LED source. Hoop is available in the pendant version in different sizes and powers and is completed with the similar ceiling versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.

Switch


On÷Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Diameter
net weight

High Bays
Aluminum
Painted
White
42 W
2520 lm
ø 60 cm.
2,3 kg.

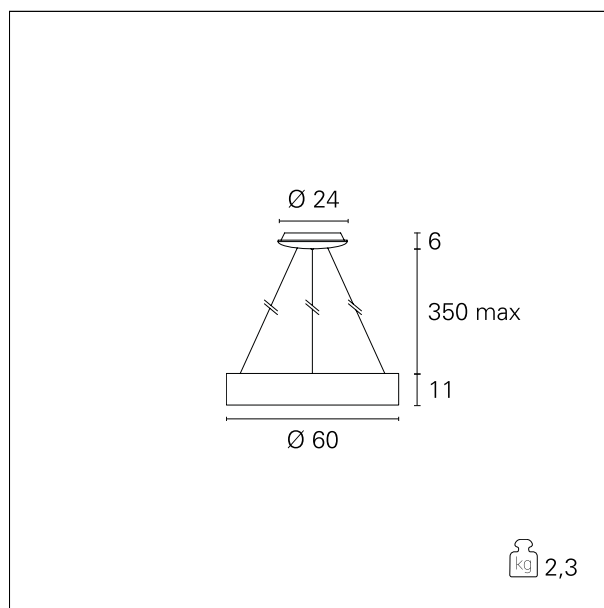

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On÷Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Hoop

SOS00116 - ø 60 cm. - 42 W - 2520 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Downlight
optic	160°

PHOTOMETRIC

